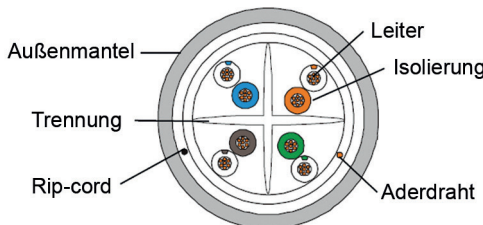


Cat6 - FTP - FLEXIBEL - PVC

Kategorie	PATCH F/UTP CAT6-4P-PVC																																																																		
Referenz	ISO/IEC 11801 TIA-568-C.2																																																																		
CPR Klasse	Fca																																																																		
Kern	Flexibel - 100% Kupfer																																																																		
Schirmung	FTP																																																																		
AWG	26	Technische Leistung (<30m): <table><tr><th>Frequenz (Mhz)</th><th>RL ≥dB</th><th>ATT ≤dB</th><th>NEXT ≥dB</th><th>DELAY ≤ns</th></tr><tr><td>1</td><td>19.1</td><td>3.0</td><td>65.0</td><td>521</td></tr><tr><td>4.0</td><td>21.0</td><td>3.5</td><td>64.1</td><td>504</td></tr><tr><td>8.0</td><td>21.0</td><td>5.0</td><td>59.4</td><td>500</td></tr><tr><td>10.0</td><td>21.0</td><td>5.5</td><td>57.8</td><td>498</td></tr><tr><td>16.0</td><td>20.0</td><td>7.0</td><td>54.6</td><td>496</td></tr><tr><td>20.0</td><td>19.5</td><td>7.9</td><td>53.1</td><td>495</td></tr><tr><td>25.0</td><td>19.0</td><td>8.9</td><td>51.5</td><td>495</td></tr><tr><td>31.25</td><td>18.5</td><td>10.0</td><td>50.0</td><td>494</td></tr><tr><td>62.5</td><td>16.0</td><td>14.4</td><td>45.1</td><td>492</td></tr><tr><td>100</td><td>14.0</td><td>18.6</td><td>41.8</td><td>491</td></tr><tr><td>200</td><td>11.0</td><td>27.4</td><td>36.9</td><td>490</td></tr><tr><td>250</td><td>10.0</td><td>31.1</td><td>35.3</td><td>490</td></tr></table>	Frequenz (Mhz)	RL ≥dB	ATT ≤dB	NEXT ≥dB	DELAY ≤ns	1	19.1	3.0	65.0	521	4.0	21.0	3.5	64.1	504	8.0	21.0	5.0	59.4	500	10.0	21.0	5.5	57.8	498	16.0	20.0	7.0	54.6	496	20.0	19.5	7.9	53.1	495	25.0	19.0	8.9	51.5	495	31.25	18.5	10.0	50.0	494	62.5	16.0	14.4	45.1	492	100	14.0	18.6	41.8	491	200	11.0	27.4	36.9	490	250	10.0	31.1	35.3	490
Frequenz (Mhz)	RL ≥dB		ATT ≤dB	NEXT ≥dB	DELAY ≤ns																																																														
1	19.1		3.0	65.0	521																																																														
4.0	21.0		3.5	64.1	504																																																														
8.0	21.0		5.0	59.4	500																																																														
10.0	21.0		5.5	57.8	498																																																														
16.0	20.0		7.0	54.6	496																																																														
20.0	19.5		7.9	53.1	495																																																														
25.0	19.0		8.9	51.5	495																																																														
31.25	18.5		10.0	50.0	494																																																														
62.5	16.0	14.4	45.1	492																																																															
100	14.0	18.6	41.8	491																																																															
200	11.0	27.4	36.9	490																																																															
250	10.0	31.1	35.3	490																																																															
Durchmesser Kabel	6,1 mm																																																																		
Länge	50m																																																																		
Bandbreite	250.0 MHz																																																																		
Biegeradius	-																																																																		
Maximale Ziehkraft (Mpa)	≥ 13.5																																																																		
Material Außenmantel	PVC																																																																		
Farbe Außenmantel	Grau	<table><tr><th>Frequenz (Mhz)</th><th>PSNEXT ≥dB</th><th>ELFEXT ≤dB</th><th>PSELFEXT ≥dB</th></tr><tr><td>1</td><td>62.0</td><td>64.2</td><td>61.2</td></tr><tr><td>4.0</td><td>61.8</td><td>52.1</td><td>49.1</td></tr><tr><td>8.0</td><td>57.0</td><td>46.1</td><td>43.1</td></tr><tr><td>10.0</td><td>55.5</td><td>44.2</td><td>41.2</td></tr><tr><td>16.0</td><td>52.2</td><td>40.1</td><td>37.1</td></tr><tr><td>20.0</td><td>50.7</td><td>38.2</td><td>35.2</td></tr><tr><td>25.0</td><td>49.1</td><td>36.2</td><td>33.2</td></tr><tr><td>31.25</td><td>47.5</td><td>34.3</td><td>31.3</td></tr><tr><td>62.5</td><td>42.7</td><td>28.3</td><td>25.3</td></tr><tr><td>100</td><td>39.3</td><td>24.2</td><td>21.2</td></tr><tr><td>200</td><td>34.3</td><td>18.2</td><td>15.2</td></tr><tr><td>250</td><td>32.7</td><td>16.2</td><td>13.2</td></tr></table>	Frequenz (Mhz)	PSNEXT ≥dB	ELFEXT ≤dB	PSELFEXT ≥dB	1	62.0	64.2	61.2	4.0	61.8	52.1	49.1	8.0	57.0	46.1	43.1	10.0	55.5	44.2	41.2	16.0	52.2	40.1	37.1	20.0	50.7	38.2	35.2	25.0	49.1	36.2	33.2	31.25	47.5	34.3	31.3	62.5	42.7	28.3	25.3	100	39.3	24.2	21.2	200	34.3	18.2	15.2	250	32.7	16.2	13.2													
Frequenz (Mhz)	PSNEXT ≥dB		ELFEXT ≤dB	PSELFEXT ≥dB																																																															
1	62.0		64.2	61.2																																																															
4.0	61.8		52.1	49.1																																																															
8.0	57.0		46.1	43.1																																																															
10.0	55.5		44.2	41.2																																																															
16.0	52.2		40.1	37.1																																																															
20.0	50.7		38.2	35.2																																																															
25.0	49.1		36.2	33.2																																																															
31.25	47.5		34.3	31.3																																																															
62.5	42.7	28.3	25.3																																																																
100	39.3	24.2	21.2																																																																
200	34.3	18.2	15.2																																																																
250	32.7	16.2	13.2																																																																
Aderfarben	1 - Blau/Weiß-Blau																																																																		
	2 - Orange/Weiß-Orange																																																																		
	3 - Grün/Weiß-Grün																																																																		
	4 - Braun/Weiß-Braun																																																																		
Rip-cord	Integriert																																																																		
Verpackung	Abrollkarton																																																																		